


	Product Specification	Version
		V1.0
Product Type	Visible Light Laser Lighting Module	
Product Name	VL-RGB-1 000-MP-01	
Product Number	K10070006	
Product Size	L*W*H=392.5* 153*139m m	
Application Range Safe city, large-scale factory, intelligent transportation, on - board system, airport port, oil depot, security department, prison, water conservancy and electric power, energy mining, ecological protection, administrative law enforcement, fishery and sea surveillance, border defense and other night vision monitoring fill light.		
Statement reserve the right to update the ensure that the latest and best prod ucts are		
3KM Optoelectronics Technology Co., Ltd.		File Type!Specification
Prepared	Lgl	Sep29, 2022
Review	Lzhj	Sep3Q 2022
Approve	wym	Sep3Q 2022

Optical and Electrical Parameters	
Item	Parameters
Size	L*W*H:392.5*153*139mm
Weight	2.5kg
Input Voltage	DC 24V±10%
Input Current	≤3.0A
Initialization Time	≤10s
Consumed Power	≤70W
Output Optical Power P _o	≤10.0W
Center Laser Wavelength	R:638nm±10nm ;G:525nm±10nm ;B:450nm±10nm @25℃
Lighting Angle	0.3°~30°(Continuous zoom)
Spot Diameter	φ5.3m(@0.3°, @1000m)
Longest Lighting Distance	≥1000m
Communication Interface	RS485/ UART port TTL(Default: 9600bps)
Communication Protocol	Pelco_D
Operating Mode	Continuous Working Mode
Operating Life	≥20000H
Storage Temperature	-40℃~+70℃
Operating Temperature	-35℃~+55℃
Laser Safety Level	Class IV(IEC 60825)
Laser Safety Distance	≥150m(@0.3°)

Product Size

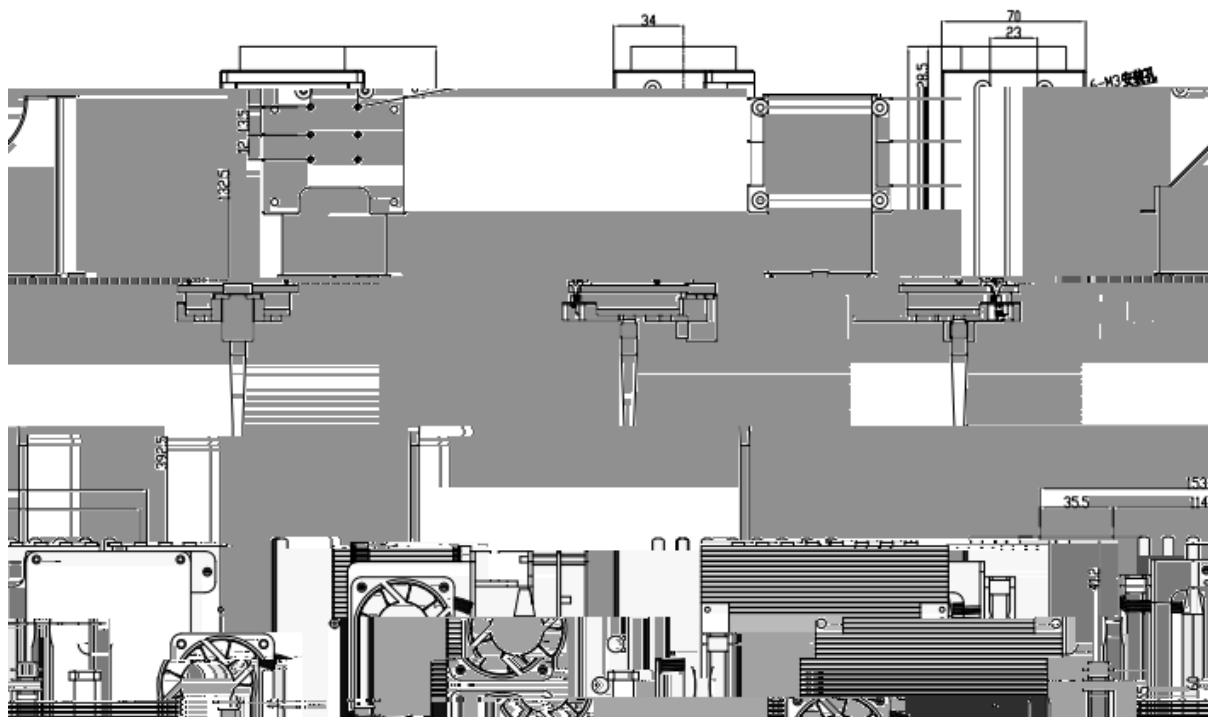

unito!mm

Pin Definition

Precautions

- 1.This product belongs to Class IVinvisible laser. When the laser light is on, it is strictly forbidden to use the eye to look back or use optical instruments to observe the laser beam.
- 2.Under normal use, it is forbidden to block flammable objects within 100cm in front of the lens to prevent fire.
- 3.During the use of this product, the product should be installed in a position that cannot be directly viewed by the human eye, or have a sufficient distance (>110m) from the position of the human eye. The manufacturer should flexibly select the radiation of the laser according to the monitored scene. Power to prevent damage to the human eye caused by the product.
- 4.When using the products of our company, the manufacturer should put a laser radiation warning label on the outside of the product.
- 5.If the manufacturer finds that the device is faulty during use, please send the product back to our company for repair. Do not disassemble it. After disassembly, no warranty will be made.

Contact Information

Company Name:	3KM Optoelectronics Technology Co., Ltd.
Business Phone:	+86-0755-6686 4401
Company website:	www.sz3km.cn
Email:	sales@sz3km.com
Address:	12F, Building 1, Heng Changrong Hi-Tech Park, No. 128 Shangnan East Road, Xinqiao Street, Baoan District, Shenzhen,P.R.C